

Modular reducing valve



Technical specification

Specification	02	03
Max. working pressure (MPa)	21	
Max. Flow (L/min)	35	70
Working fluid	Mineral oil; phosphate-ester	
Fluid temp. (°C)	-20-70	
Viscosity (mm ² /s)	12-380	
Working press (MPa)	7	14 21
Weight (kg)	1.29	3.39
Cleanliness	The maximum allowable cleanliness of the oil should be according to 9th degree of Standard NAS1638. It is suggested that the minimum filter rating should be $\beta_{10} \geq 75$.	

Model description

D G M X 2 * * - * - * / * 7 0 *

Modular reducing valve

Specification
3 NS 6
5 NS 10

P P Pipeline relief
A A Pipeline relief
B B Pipeline relief

Working pressure
7 to 7MPa
14 to 14MPa
21 to 21MPa


Remarks

Serial number

Seal material
Omit NBR Seals
V FPM Seals

8 Handle

Code symbol

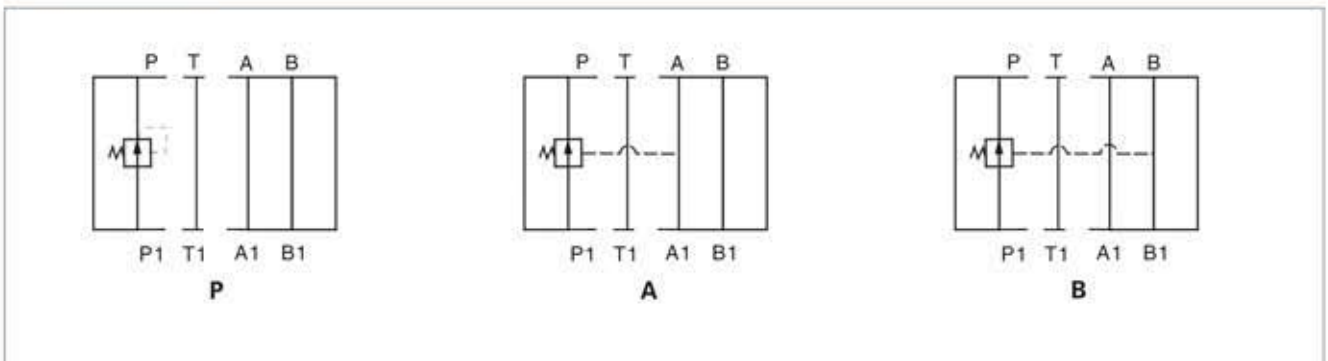

Modular reducing valve

03 External dimensions

DGMX2-5

